



**P806**  
**OUTDOOR LANDSCAPE LIGHTING**  
**PATH LIGHT**



**Project**

**Location**

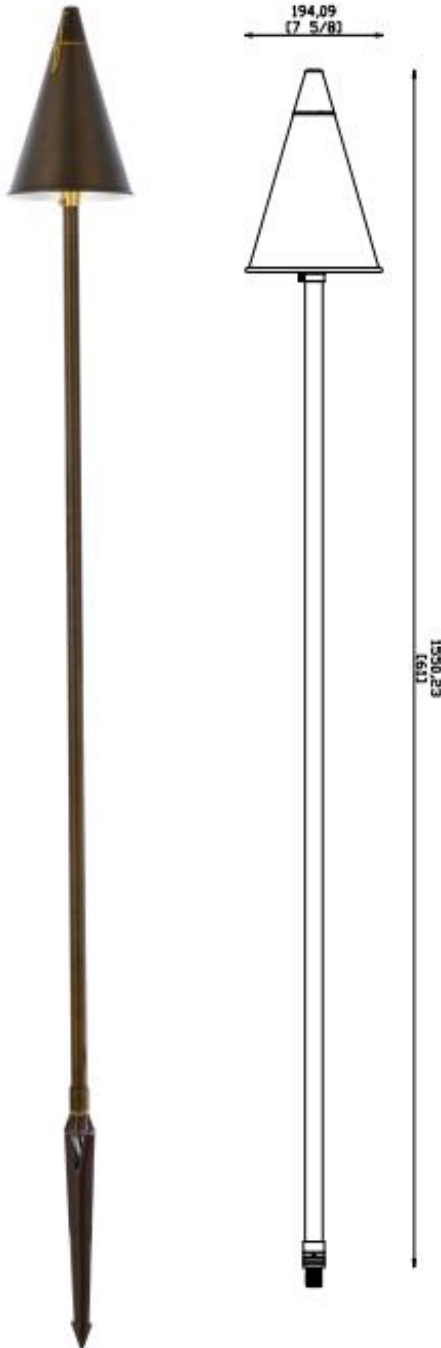

**PRODUCT DESCRIPTION**

8" shade spinning brass path light with 3' lead wire, using G4 lamp (not included) halogen.

**SPECIFICATIONS:**

**Material:** Spinning Brass  
**Lead wire:** 3' SPT-1W 18A  
**Glass or Lens:** Clear Glass  
**light source(not included):** G4 Bulb Halogen  
**Maximum Lamp Rating:** 20W

**FINISHES:** Antique Brass

**INSTALLATION:**

1.Hammer the spike into ground. Clear away area in ground at wire way slot in top of spike. Lay 12V cable into wire way slot and screw luminaire into spike. Expose the socket by loosening the shade connector from stem. Install the G4 lamp into the socketed-install shade connector back to stem. Turn off power. Make wire connections using approved wiring connection method (not sunlied).

**HOW TO FILL THE FUEL:**

**IMPORANT:** Only use citronella or other approved fuels in unit.

1.Unscrew the lid and remove the top shade and bottom shade from the fuel can.Pour fuel in the fixture's fuel can.Replace bottom shade and washer to the fuel can,screw the lid tightly before lighting.Light fuel at wick.After extinguishing flame,let cool and then put on top shade

**DIMENSIONS:** D 8" X H 61"

**LABELS:** N/A